

COMBAT READY

THE BEST ATTACK HOSE, GUARANTEED

MADE IN
USA



THIS IS KEY

Combat Ready is the double jacket attack line engineered from the inside out — delivering it all, higher flows, superior heat and abrasion resistance and increased durability. Combat Ready combines ring spun polyester staple fibers over an inner lining consisting of a one-piece extruded through-the-weave nitrile/PVC tube — making the tube, jacket liner and cover one complete assembly. This legendary through-the-weave design reduces friction loss while providing unmatched kink resistance. Designed for low pressure high volume nozzles, Combat Ready offers high flow capabilities to combat the most aggressive attack situations. The outer jacket is available with double dip "Key-Lok" polyurethane based polymer impregnation for enhanced abrasion and moisture resistance. Features a 10-year warranty, which includes a 1-year warranty on wear and tear.

KEY HOSE

DOUBLE JACKET ATTACK HOSE



ATTACK HOSE

COMBAT READY

DOUBLE JACKET ATTACK HOSE

Diameter	Part No.	Service Test	Proof Test	Coefficient of Flow	Bowl Size	Weight Uncoupled
1 3/4"	DP17-1000	500 psi	1000 psi	6.5	2 1/4"	0.38 lbs/ft
2"	DP20-1000	500 psi	1000 psi	*4.1	2 2/5"	0.44 lbs/ft
2 1/2"	DP25-1000	500 psi	1000 psi	1.8	3"	0.52 lbs/ft

*Coefficient of flow of 4.1 is attained when using 2 1/2" coupling.
The 1 1/2" coupling option has a 5.2 coefficient of flow.

Hose Construction

This hose is designed specifically for aggressive fire attack operations. The outer jacket is woven from ring spun staple polyester yarns over an inner liner consisting of a one-piece extruded through-the-weave nitrile/PVC tube. Color or clear coat abrasion resistant "Key-Lok" process is standard. Combat Ready is manufactured in a high-visibility fashion with two red and two blue stripes running the length of the hose. This heat, abrasion and kink resistant hose shall have superior friction loss characteristics. Lengths available up to 75'. Warranty: Hose shall carry a 10-year written warranty, which includes a 1-year wear/tear warranty.

Inner Hose Properties

When the hose is tested in accordance with NFPA 1961, the liner shall have the following properties:

Ultimate Tensile Strength - Shall not be less than 1200 psi.

Ultimate Elongation - Shall not be less than 200%.

Accelerated Aging Test - Shall meet requirements of UL19 for accelerated aging.

Adhesion - Between reinforcement and liner shall be a minimum of 20 pounds.

Ozone Resistance - Shall show no signs of visible cracking of the cover of liner when tested in accordance with ASTM D1149-91 and ASTM D518-86 (R91), Procedure B.

Chemical Resistance - Exposure to seawater and contamination by most chemicals will have no effect on the short or long term performance of the hose.

Safety Factors

Abrasion Resistance - A direct relationship to the safe performance of the fire hose. The UL abrasion test most closely resembles the fire ground use of fire hose and as such, is considered of prime importance. Hose meeting all of the abrasion resistance safety factors below shall do so without exceeding average weights.

UL Abrasion - The hose shall pass a burst test after 5000 cycles on a reciprocating abrasion tester - as specified in UL Standard 19.

Cold Resistance Safety Factor - Hose shall be capable of safe use down to -50 °F. The hose shall have no apparent damage to cover reinforcement or lining when subjected to the following cold flexibility test: a 50' length of dry hose is coiled and placed in a cold box at -35 °F for a duration of 24 hours. Immediately after removal of the hose from the box, hose should be uncoiled and laid out by one operator.


Flashover Resistance Safety Factor - Heat resistance is of the utmost importance when evaluating interior attack hose. This hose shall meet the safety factors for heat resistance without exceeding the normal fire hose weight. The hose shall be subjected to a static pressure of 100 psi and be capable of withstanding a surface temperature of 1200 °F for a minimum of 30 seconds without bursting.

Water Pick-up Weight - The tendency for a hose to absorb water while in a wet environment can create significant handling difficulties. When tested against the procedure listed in MIL-H-24606 latest edition, the maximum weight gain shall not exceed 3 pounds per 50' length.

Couplings

Combat Ready shall be "doubled ring" with extruded aluminum 6061-T6 USA manufactured couplings. Knurled couplings, 2" x 2 1/2" and other custom features available upon special request.

Colors

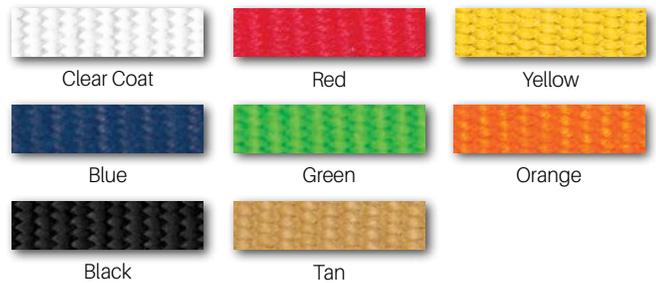

Key Hose reserves the right to modify any specification without prior notice to meet or exceed changing standards. For more information please contact a Key Hose authorized distributor. 10/17